



Chromo Inc. T2 Motherboard Replacement

This will guide you through replacing your Chromo Inc. T2 motherboard.

Written By: Ismael DeLuna



INTRODUCTION

Using basic tools and a Soldering Station, you will be removing the motherboard for the Chromo Inc. T2.



TOOLS:


- [iFixit Opening Tools](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
 - [Soldering Station](#) (1)
-

Step 1 — Removing the Casing





- Place your Plastic Opening Tool between the screen and the case. Slowly move it around the casing while prying in a downward motion to undo the hinges holding the two together and separate the two parts.

Step 2 — Turn it around

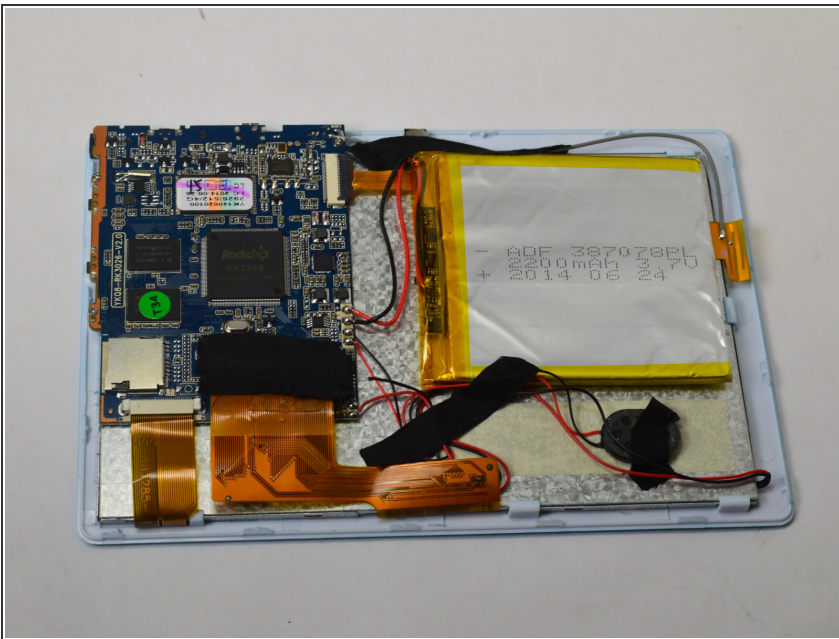



- After separating the case and screen, turn your screen face down so you can see the internal parts!

Step 3 — Disconnecting Flex Cables

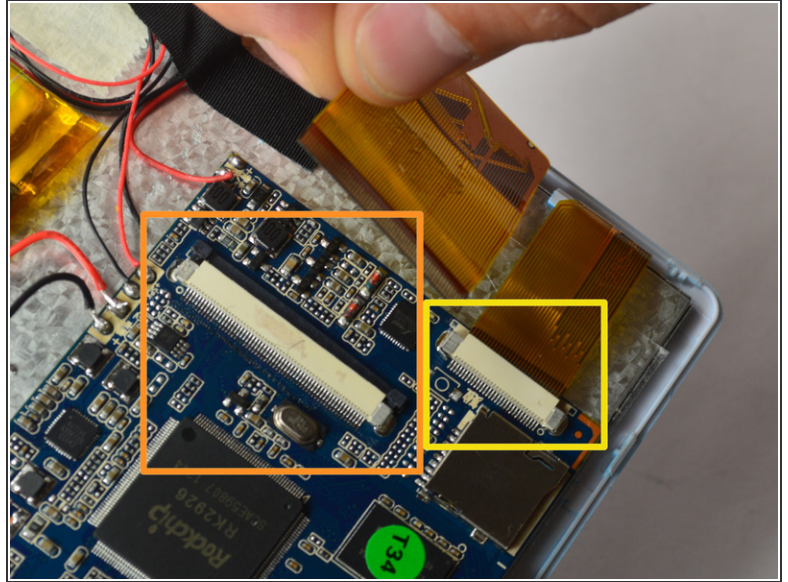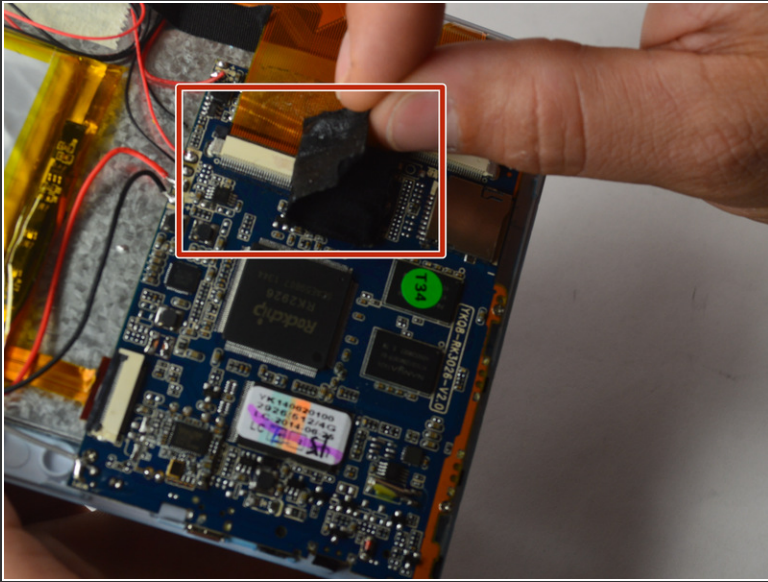



- Peel back the tape holding the big flex cable in place.
- Using your plastic opening tool, gently push back the gray connector to free the flex cables and then pull them out.

Step 4 — Disconnecting the Camera

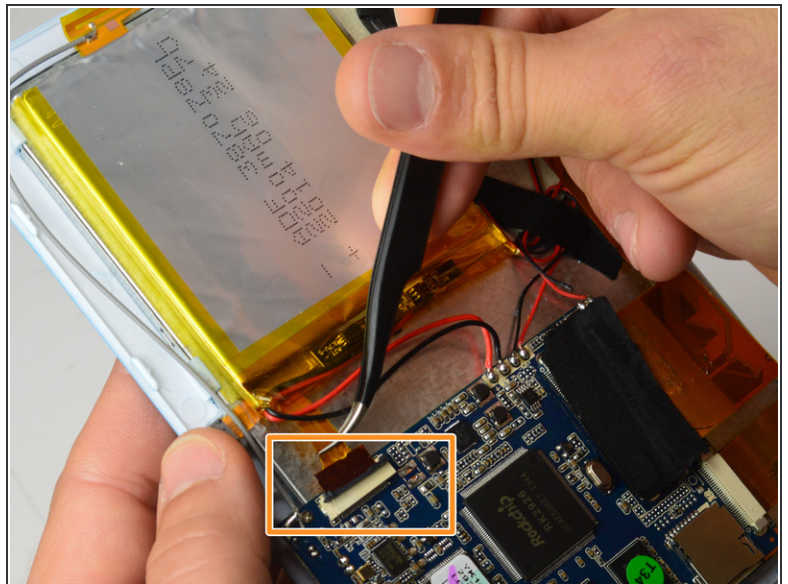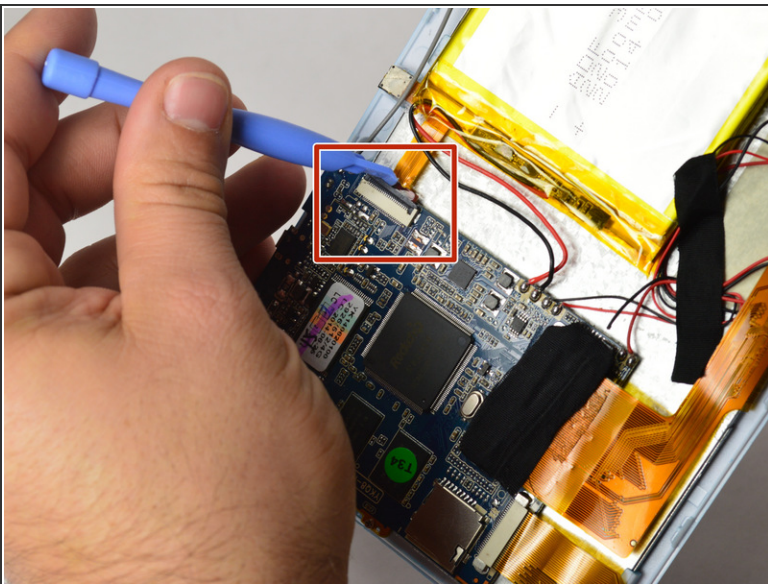




- Using the small plastic opening tool, gently push the gray connector back to unlock the flex cable.
- Using a pair of tweezers, gently grasp the flex cable and disconnect it from the connector.

Step 5

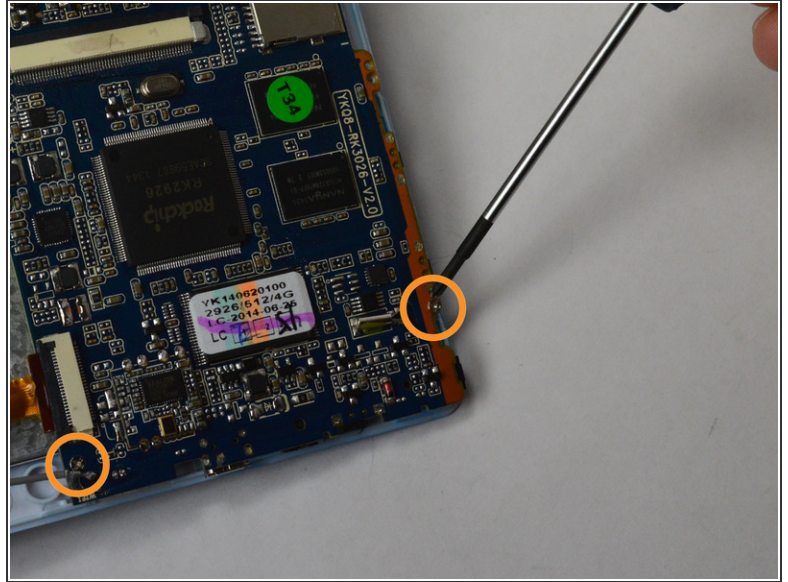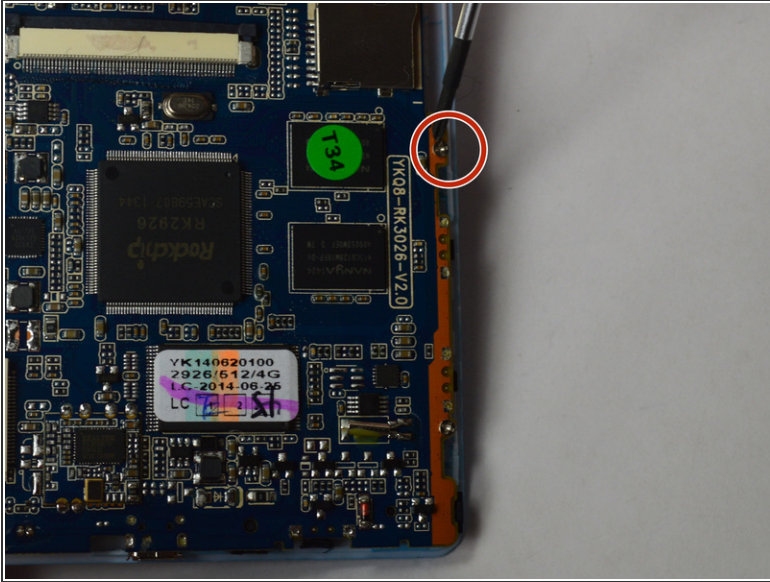



- Using a Phillips #00 Precision Screwdriver, remove the three 3mm screws holding the motherboard.

Step 6

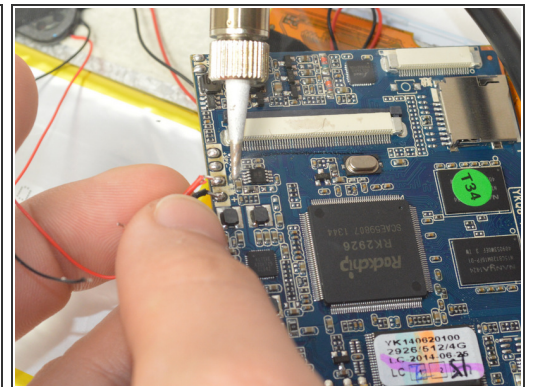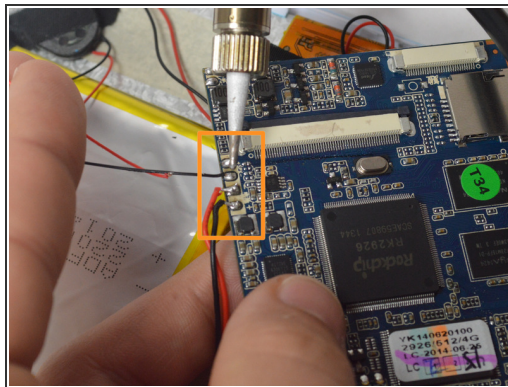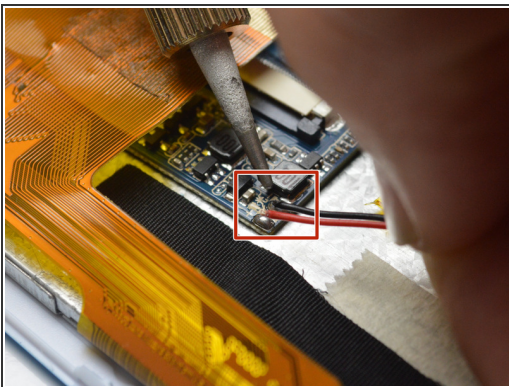

- Using your soldering iron, desolder the six wires on the side of the logic board.
- ⓘ Note: Remember where these wires go as re-connecting them incorrectly can lead to damaging the device!
- ⚠ Soldering Iron gets very hot, take care to not touch anywhere on the soldering iron except for the handle!


Step 7

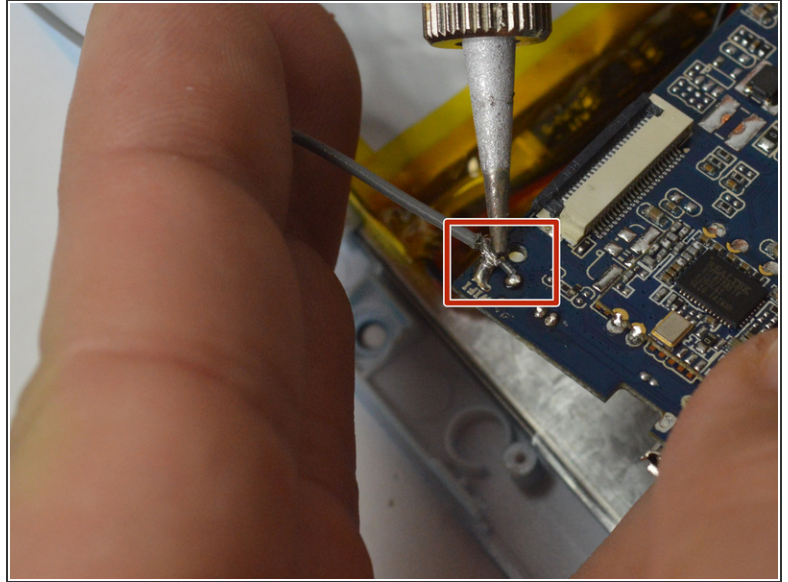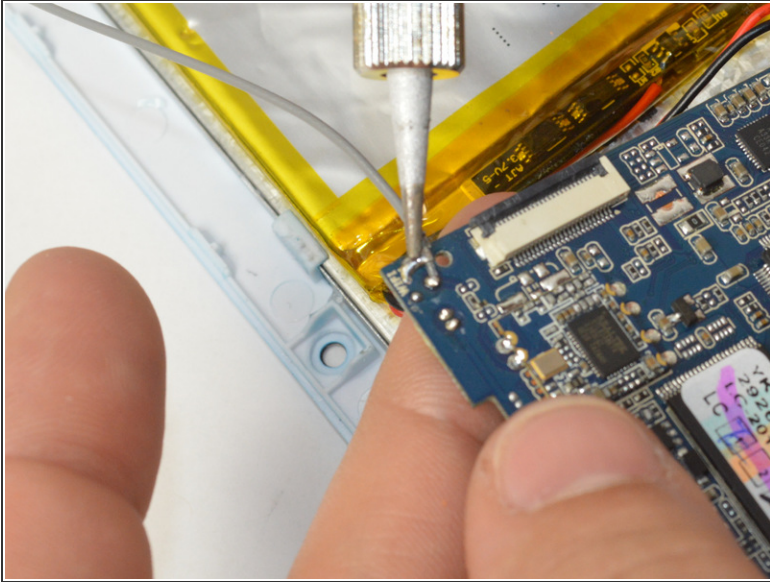

- Using your soldering iron, desolder the grounding cable on the motherboard.

⚠ Soldering Iron gets very hot, take care to not touch anywhere on the soldering iron except for the handle!

Step 8

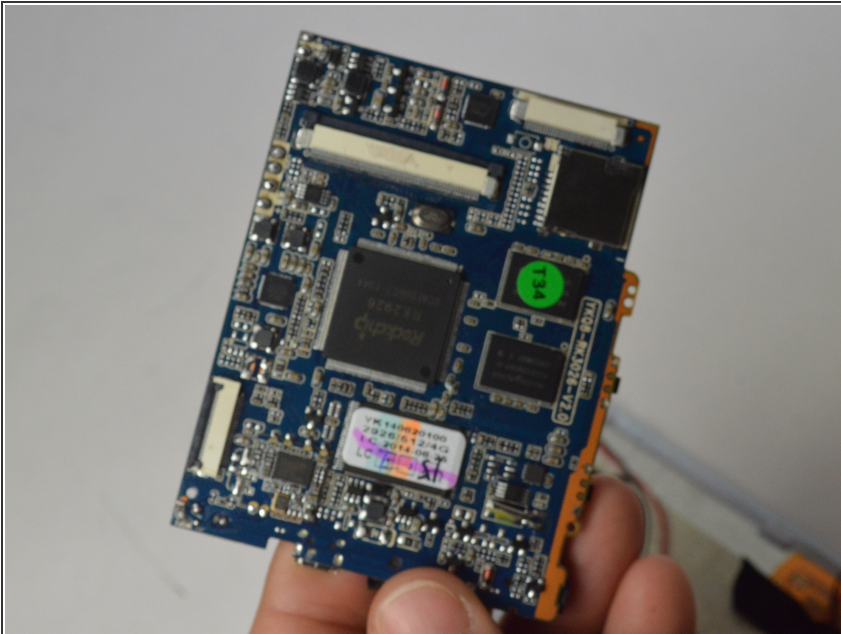

- Your motherboard is now ready for replacement!

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-22 02:03:03 PM.